

Sharkoon

X-TATIC ANALOG



Handbuch

Manual

Manuel d'utilisation

Guía usuario

Manuale d'istruzioni

Gebruiksaanwijzing

Guia usuário

Instukcja obsługi

Content

| | |
|--|----|
| 1. Features X-Tatic Analog | 15 |
| 2. Specifications X-Tatic Analog | 15 |
| 3. Compatibility X-Tatic Analog | 15 |
| 4. Parts and accessories | 16 |
| 5. The headset at a glance | 17 |
| 5.1 The volume controller | 18 |
| 5.2 The connections | 19 |
| 6. Connecting the microphone to the headset | 19 |
| 7. Connecting the headset to a PC or any other analog source | 20 |
| 8. Upgrade option | 21 |

Dear customer!

Congratulations for purchasing one premium quality SHARKOON product.
For a long life time and to take full advantage of this product we recommend that you read this manual completely.

Have a good time with our product!

SHARKOON Technologies GmbH

1. Features X-Tatic Analog

- 5.1 channel headset
- 8 speakers (4 in each earpiece)
- Digital, in-line volume control
- High end amplifier
- Independent, illuminated volume adjustment for each channel and master volume
- Detachable microphone with QuickOn connection

2. Specifications X-Tatic Analog headset

- Center speaker: 2 x 27 mm
- Front speaker: 2 x 30 mm
- Rear speaker: 2 x 30 mm
- Subwoofer: 2 x 40 mm
- Impedance: 32 Ohm
- Microphone: 6 x 5 mm (L x W) / unidirectional
- Cable Length: 360 cm
- Connection: 1 x 9-pin analogue plug

3. Compatibility X-Tatic Analog headset

- PC / MAC / other sources: analogue input (via cable adapter)

4. Parts and accessories



- X-Tatic Analog 5.1 headset (A)
- Microphone (B)
- Cable adapter (9-pin analogue plug > 3 x 3.5 mm / C)
- Power adapter (D)
- Manual

Note:

If you are missing any of the items listed above, please contact customer service via e-mail at support@sharkoon.com or call: + 49 (0) 6403 – 775 6100

5. The headset at a glance



- A – Headband
- B – Headphones
- C – Detachable, adjustable microphone




- D – Microphone connector

5.1 The volume controller




- A – Volume adjustment for each channel after pressing the according button (button illuminated) or main volume adjustment respectively (all buttons illuminated) as well as volume on/off (by pressing this controller)
- B – Microphone volume (only Xbox 360)
- C – Control button for the front, rear and center speaker as well as for the subwoofer (Sub). The volume level is displayed by different colors.
- D – Microphone on/off
- E – Connection for Xbox 360 microphone – see below 8.)

5.2 The connectors

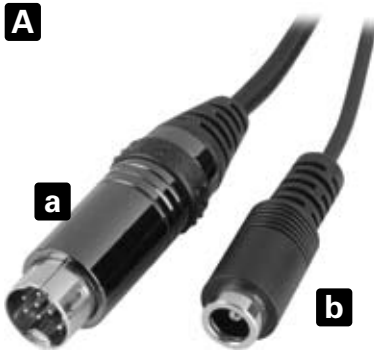

- A – Headset connectors
- a – 9-pin analog connector
- b – ISO power connector

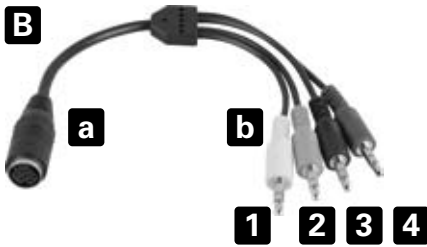

- B – Cable adapter
- a – 9-pin analog jack
- b – 3.5 mm stereo plug for each channel:
 - 1 – Microphone connector (pink)
 - 2 – Subwoofer connector (orange)
 - 3 – Connector for rear speakers (black)
 - 4 – Connector for front speakers (green)

6. Connecting the microphone to the headset

1. Insert the microphone's 3.5 mm stereo plug (fig. 1) loosely into the headset's microphone connector (fig. 2).



fig. 1



fig. 2

2. Turn the microphone until the indications on the microphone and on the headset are opposite to each other (fig. 3).



fig. 3

3. Press the microphone's plug into the headset's jack completely and turn the microphone to the front and into the desired position.

7. Connecting the headset to a PC or any other analog source

1. Connect the included power supply to a wall outlet and to the headset's ISO power connector.
2. Connect the cable adapter's 9-pin connector to the according connector of the headset cable.
3. Connect the X-Tatic Analog's single 3.5 mm stereo plugs to the respective analog connector jacks of your PC's 5.1 sound card (or any other compatible device). For convenient handling, the connectors are color coded. The headset is ready to use.

8. Upgrade option

We offer you the possibility to upgrade your X-Tatic Analog to an X-Tatic Digital by simply purchasing the X-Tatic Sound Control Unit (fig. 4).



fig. 4

This digital control box enables you to extend the functionality of your X-Tatic Analog immensely and to use it e.g. with the Xbox, the Xbox 360, the PS2 and PS3 as well as with other devices providing digital audio output.

Features X-Tatic Sound Control Unit (SCU)

- Supports Dolby Digital 2.0, Dolby Digital 5.1 and Dolby Pro Logic
- Supports the chat function of PS3, Xbox and Xbox 360
- Dynamic Range Control

Specifications X-Tatic SCU

- Digital optical input (S/PDIF)
- 2 analogue audio outputs for X-Tatic Analog / Digital
- 3 analogue 3.5 mm audio outputs (front, rear, center / subwoofer)
- 1 microphone connector for PS3 (USB A > USB B)
- 1 power connector
- Dimensions: 15 mm x 122 mm x 56 mm (H x L x W)
- Weight: 110 g

Compatibility X-Tatic SCU

- Xbox / Xbox 360: optical input
- PS2 / PS3: optical input / USB microphone connection
- PC / MAC: optical input / USB microphone input
- DVD / other sources: optical input

Warning:

Xbox, Xbox 360, Xbox Advanced AV Pack, Xbox Communicator, Xbox Live and the respective images/logos are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries.

PlayStation, PlayStation 2, PlayStation 3, PS2, PS3 and the respective images/logos are registered trademarks or trademarks of Sony Computer Entertainment Inc.

Dolby, Pro Logic, the double-D symbol and the respective images/logos are registered trademarks or trademarks of Dolby Laboratories.

All named products and descriptions are trademarks and/or registered trademarks of the respective manufacturers and are accepted as protected.

As a continuing policy of product improvement at SHARKOON, the design and specifications are subject to change without prior notice. National product specifications may vary.

All rights reserved especially (also in extracts) for translation, reprinting, reproduction by copying or other technical means. Infringements will lead to compensation.

All rights reserved especially in case of assignation of patent or utility patent. Means of delivery and technical modifications reserved.

© **SHARKOON Technologies GmbH 2008**
www.sharkoon.com